

Specification for Approval

Date: 2024/1/1

Customer:

BYTEK P/N: BAM0806NF-350T01

CUSTOMER P/N:

DESCRIPTION:

QUANTITY: pcs

REMARK:		
Customer Approval Feedback		

深圳市栢亿科技有限公司
ShenZhen BYTEK Technology Co., Ltd.

Unit 1701, Silicon Valley Power E-commerce
Port, No. 10, Longgang Road, Longgang
District, Shenzhen, Guangdong Province
TEL: (+86)755-8242 3892
FAX: (+86)755-8242 3852
E-MAIL: vincent@bytek.com.cn

Sales Dep.

APPROVED	CHECKED
谢林阳	李昱珩

R&D Center

APPROVED	CHECKED	DRAWN
文 睿	谢庆芬	兰 静

Multilayer Common Mode Choke Coils



BAM0806NF-350T01

1. Scope

This specification applies to Multilayer Common Mode Choke Coil, BAM Series Its Application is limited for the High speed differential transmission line like as followings.

USB, LVDS, MIPI, MDDI, MHL, HDMI, DVI.

2. Dimensions




Chip Size						
Size	A	B	C	P	D1	D2
0806	0.85±0.05	0.65±0.05	0.40 ±0.05	0.50±0.10	0.27±0.10	0.20±0.05/-0.1

Units: mm

3. Part Numbering

BAM	0806	NF	-	350	T	01
A	BC			D	E	F


A: Series
 B: Dimension A x B
 C: Material Lead Free Code
 D: Impedance Common Mode Impedance 350=35
 E: Packaging T=Taping and Reel ,
 F: Explain

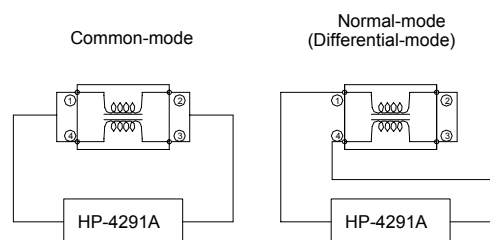

4. Specification

Part Number	Common Mode Impedance ()	Test Frequency (MHz)	Rated Voltage (Vdc) max.	Insulation Resistance (M) min.	DC Resistance () max.	Rated Current (mA) max.
BAM0806NF-350T01	35±25%	100	5	100	2.5	100


Impedance-Frequency Characteristics

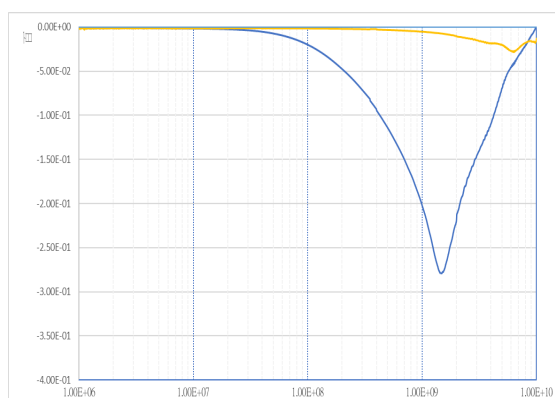

5. Reliability and Test Condition

Item	Performance	Test Condition																		
Series No.	BAM	--																		
Operating Temperature	-40~+85 (Including self-generated heat)	--																		
Transportation Storage Temperature	-40~+85	For long storage conditions, please see the Application Notice																		
Impedance (Z)	Within the specified tolerance	Measuring equipment:4291A or its equivalent Measuring jig: 16192A (or its equivalent)																		
Insulation Resistance		Measuring points: 1 to 2 or 3 to 4 Measuring voltage: Rated voltage																		
DC Resistance		Measuring points: 1 to 2 or 3 to 4																		
Rated Current																				
Vibration	Per table 1.	Test sample shall be soldered to test board and the test shall be conducted under the conditions shown in Table 2. <u>Table 2</u> <table><tr><td>Vibratoin frequency range</td><td colspan="2">10Hz to 55Hz</td></tr><tr><td>Overall amplitude</td><td colspan="2">1.5mm</td></tr><tr><td>1 cycle</td><td>1min.(10</td><td>55</td><td>10Hz)</td></tr><tr><td rowspan="3">Time</td><td>X</td><td>2 hours</td><td rowspan="3">each</td></tr><tr><td>Y</td><td></td></tr><tr><td>Z</td><td></td></tr></table>	Vibratoin frequency range	10Hz to 55Hz		Overall amplitude	1.5mm		1 cycle	1min.(10	55	10Hz)	Time	X	2 hours	each	Y		Z	
	Vibratoin frequency range		10Hz to 55Hz																	
	Overall amplitude		1.5mm																	
	1 cycle		1min.(10	55	10Hz)															
Time	X	2 hours	each																	
	Y																			
	Z																			
	<u>Table 1</u> <table><tr><td>Appearance</td><td>No remarkable Defect</td></tr><tr><td>Commom Impedance change rate</td><td>Within±20%</td></tr><tr><td>Insulation resistance</td><td>100mΩ min</td></tr></table>	Appearance	No remarkable Defect	Commom Impedance change rate	Within±20%	Insulation resistance	100mΩ min													
Appearance	No remarkable Defect																			
Commom Impedance change rate	Within±20%																			
Insulation resistance	100mΩ min																			
Solderability	More than 75% of terminal electrode shall be covered with fresh solder.	Test sample shall be immersed into molten solder under the conditions shown in Table 3 after immersed into flux. After this, test samples shall be taken out and visually checked. The speed for immersion and taking out shall be 25 mm/s. <u>Table 3</u> <table><tr><td>Solder temperature</td><td>245</td><td>±3</td></tr><tr><td>Immersion time</td><td>4s</td><td>±1s</td></tr></table>	Solder temperature	245	±3	Immersion time	4s	±1s												
Solder temperature	245	±3																		
Immersion time	4s	±1s																		
Resistance to Soldering Heat	Per table 1.	Test sample shall be immersed into molten solder after immersed into flux and preheated under the conditions shown in Table 4. After this, test samples shall be taken out and measured after kept at room temperature for 2 to 3 hours.(Note 1) The speed for immersion and taking out shall be 25mm/s. <u>Table 4</u> <table><tr><td>Preheating</td><td>150</td><td>, 3min.</td></tr><tr><td>Resistance to Soldering Heat</td><td>260</td><td>±5</td></tr><tr><td>Immersion time</td><td>10s</td><td>±0.5s</td></tr></table>	Preheating	150	, 3min.	Resistance to Soldering Heat	260	±5	Immersion time	10s	±0.5s									
Preheating	150	, 3min.																		
Resistance to Soldering Heat	260	±5																		
Immersion time	10s	±0.5s																		
Thermal Shock	Per table 1.	Steps 1 to 4 shown in Table 5 as one cycle shall be repeated 5 times. After the test, keep the test sample at a normal temperature with a normal humidity for 2 to 2 hours, then measurement shall be conducted.(Note 1) <u>Table 5</u> <table><tr><td>Step</td><td>Temperature()</td><td>Duration (min)</td></tr><tr><td>1</td><td>-40 +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Normal temp</td><td>2~3</td></tr><tr><td>3</td><td>+85 +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Normal temp</td><td>2~3</td></tr></table>	Step	Temperature()	Duration (min)	1	-40 +0/-3	30±3	2	Normal temp	2~3	3	+85 +3/-0	30±3	4	Normal temp	2~3			
Step	Temperature()	Duration (min)																		
1	-40 +0/-3	30±3																		
2	Normal temp	2~3																		
3	+85 +3/-0	30±3																		
4	Normal temp	2~3																		
Resistance to Humidity	Per table 1.	Test board shall be kept in a thermo hygrostat at temperature of 40 ±2 and relative humidity of 90% to 95% for 500+24/-0 hours. After the test, keep the test sample at a normal temperature with a normal humidity for 2 to 3 hours, then measurement shall be conducted.(Note 1)																		
High Temperature Load Life Test	Per table 1.	Test board shall be kept in a thermostatic oven with temperature of 85 ±2 for 500+24/-0 hours while supplying 1 to 2 and 3 - 4 with rated current. After the test, keep the test sample at a normal temperature with a normal humidity for 2 to 3 hours, then measurement shall be conducted.(Note 1)																		

Item	Performance	Test Condition
High Temperature Life Test	Per table 1.	Test board shall be kept in an atmosphere with temperature of 85 ± 2 for 500+24/-0 hours. After the test, keep the test sample at a normal temperature with a normal humidity for 2 to 3 hours, then measurement shall be conducted.(Note 1)
Bending Strength	Appearance: No mechanical damage.	Warp : 2mm(1210),1mm(0806) Testing board : Glass epoxy-resin substrate Thickness : 0.8mm




(Note 1) If question is found in the result of measurement, another measurement shall be conducted after test samples shall be kept for 48+/-2 hours.

6. Soldering and Mounting

6-1. Recommended PC Board Pattern

Chip Size						Land Patterns For Reflow Soldering			
Type	A	B	C	D1	D2	E	F	G	H
0806	0.85±0.05	0.65±0.05	0.40 ±0.05	0.27±0.10	0.20+0.05/-0.1	0.25~0.35	0.25~0.35	0.25~0.35	0.5
1210	1.25±0.15	1.0±0.15	0.55 ±0.10	0.30±0.10	0.25+0.15/-0.1	0.45~0.55	0.7~0.8	0.25~0.35	0.55

Units: mm

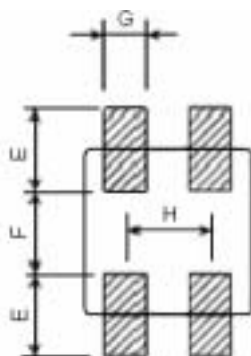

PC board should be designed so that products can prevent damage from mechanical stress when warping the board.
Products shall be positioned in the sideway direction against the mechanical stress to prevent failure.

6-2. Soldering

Mildly activated rosin fluxes are preferred. The terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

Note.

If wave soldering is used ,there will be some risk.

Re-flow soldering temperatures below 240 degrees, there will be non-wetting risk

6-2.1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1.


6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended. for Iron Soldering in Figure 2.


Preheat circuit and products to 150
350 tip temperature (max)

Never contact the ceramic with the iron tip
1.0mm tip diameter (max)

Use a 20 watt soldering iron with tip diameter of 1.0mm
Limit soldering time to 4~5sec.

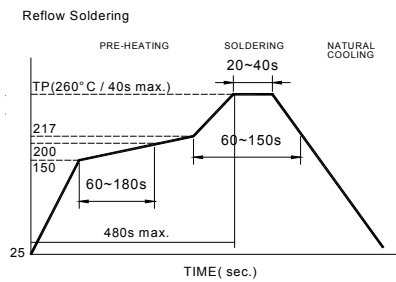

Reflow times: 3 times max
Fig.1

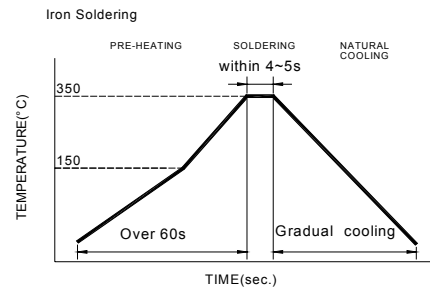


Iron Soldering times : 1 times max
Fig.2

6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

Minimum fillet height = soldering thickness + 25% product height

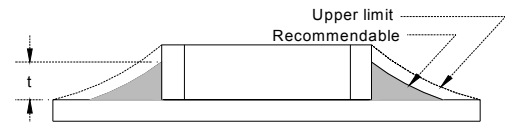

7.Packaging Information


7-1. Reel Dimension

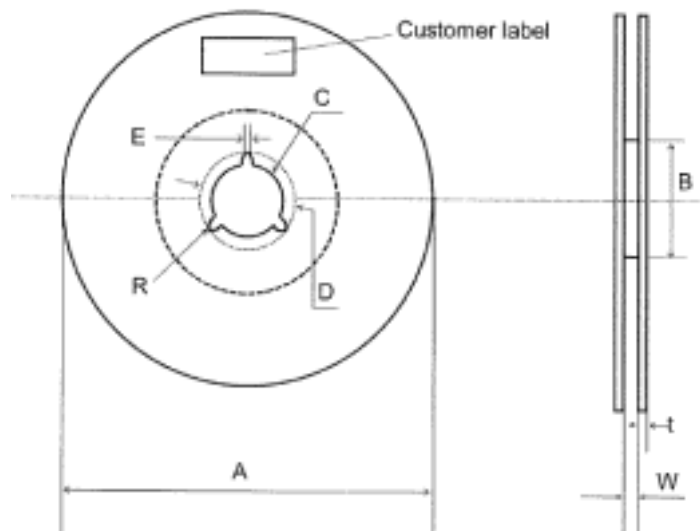

Code	A	B	C	D	E	W	t	R
Dimension	178±2.0	50 min	13±0.2	21±0.8	2.0±0.5	10±1.5	2.5 max	1.0

Units: mm

7-2. Tape Dimension (paper)

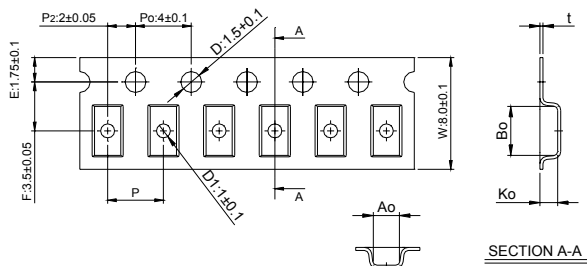


Series	B_0	A_0	K_0	P	t
0806	0.95 ± 0.05	0.75 ± 0.05	0.55 ± 0.05	4.0 ± 0.10	0.3 max
1210	1.40 ± 0.05	1.15 ± 0.05	0.65 ± 0.05	4.0 ± 0.10	0.3 max

Units: mm

7-3. Packaging Quantity

Chip size	0806	1210
Chip /Reel	10000	4000
Inner box	50000	20000
Middle box	250000	100000
Carton	500000	200000

7-4. Tearing Off Force

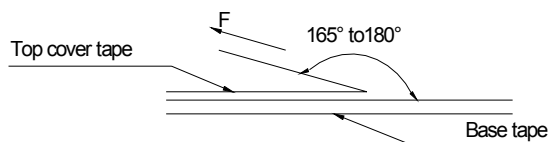

The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp. ()	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice

Storage Conditions

To maintain the solder ability of terminal electrodes:

1. BYTEK products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months from the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.