

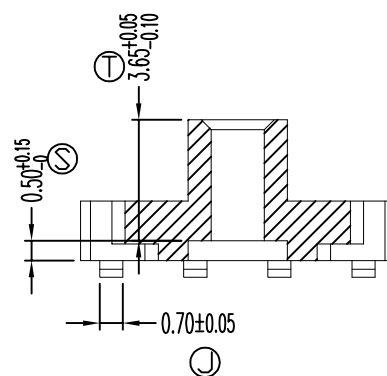
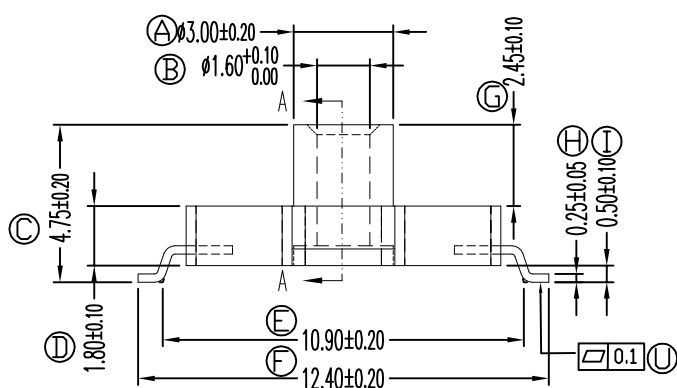
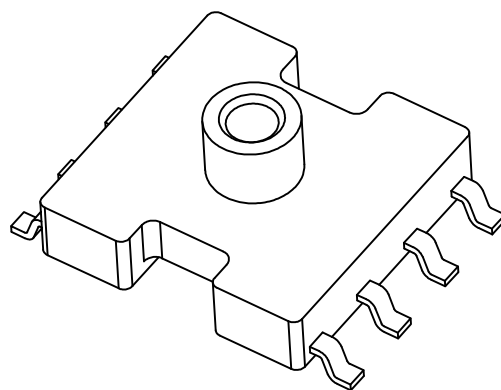
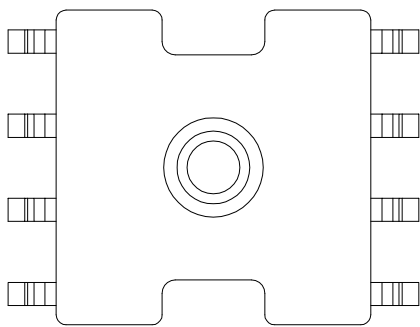


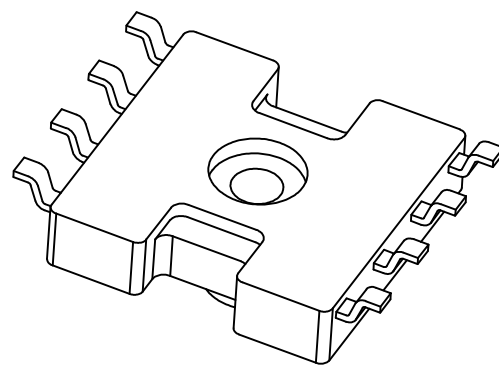

SECTION A-A

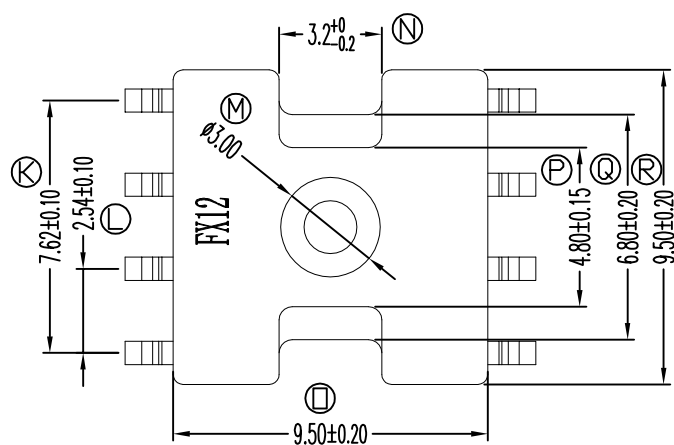

备注:

1. PIN脚平面度: 0.10MM MAX;
2. PIN脚材质: C5191; 镀层顺序及厚度:
Ni: 1.27~7.6um; Sn: 3um/Min;
3. PIN切面需电镀;
4. PIN脚拉拔力1.5Kg/Min;

REV	DATE	REVISIONS REC




东莞市福讯塑胶制品有限公司

DONGGUAN FU XUN PLASTICS PRODUCTS CO., LTD

地址: 东莞市横沥镇三江工业区116栋

TEL: 0769-82218739 82218769 FAX: 0769-82218929

DRAFTER	ZHONG FANG GENG	TOLERANCE	DATE:
CHECK	WANG	0<L≤4 ±0.1	2025.03.21
APPROVED	ZHU DONG SHENG	4<L≤16 ±0.2	
		16<L≤50 ±0.3	
		PIN PITCH ±0.2	



DRAWING TITLE:	BASE	TERMIAL DIMENTION:	C5191	ANGLE:	±1°
MODLE NAME:	FX-B039-6	TERMINAL MATERIAL:		UNIT:	mm
SPECIFICATION:	4+4 PIN	UL RATING:	94V-0	SCALE:	1 : 1
BOBBING MATERIAL:	PM9630	PULLING STRENGTH:	1.5Kg/MIN	REV:	A/1