
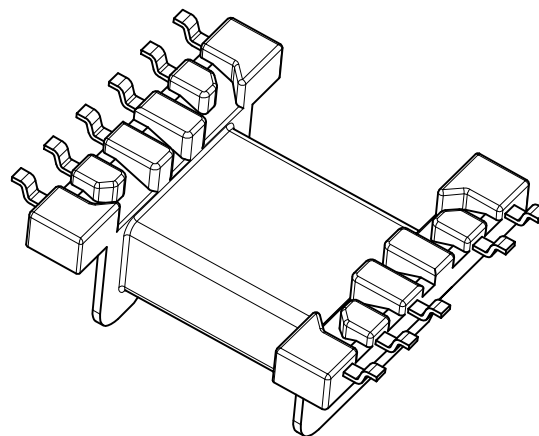
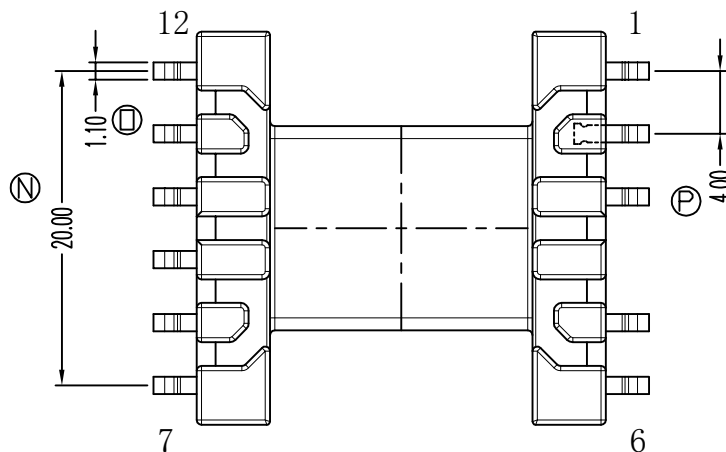
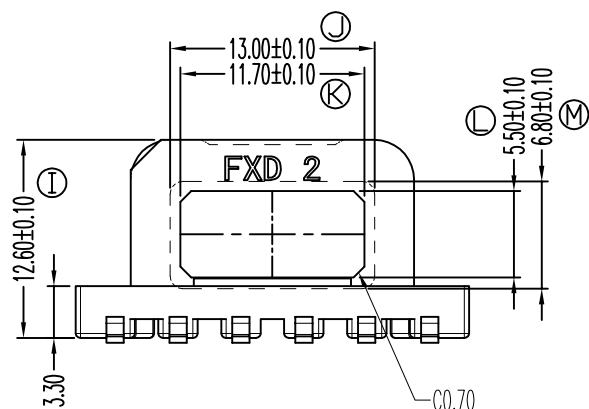
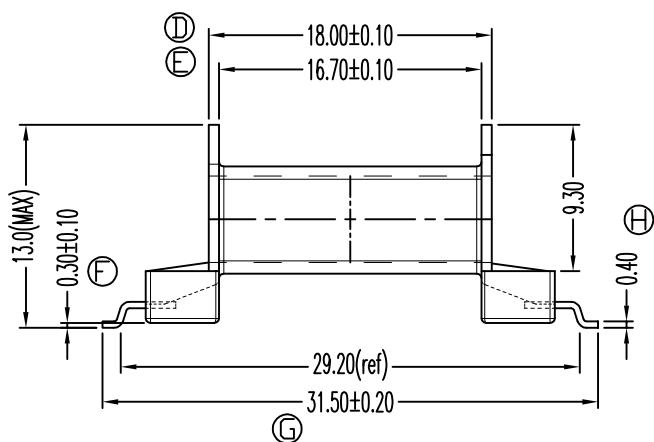
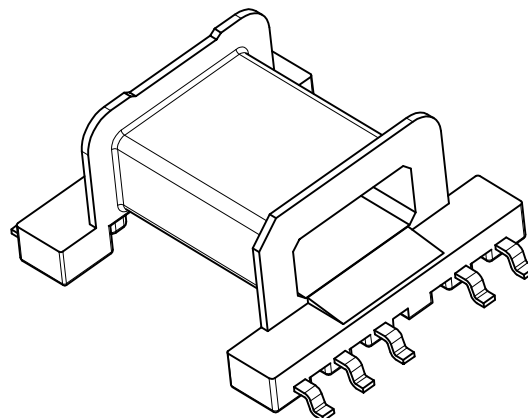


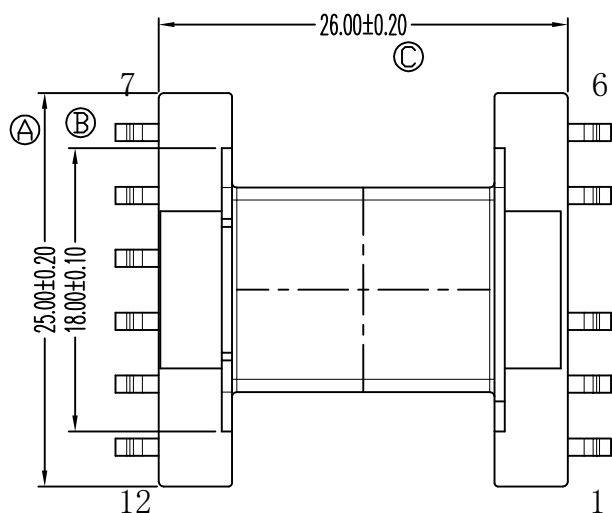

空4PIN

备注:

1. 未注圆角为R0.1-0.3MM;
2. 最大毛边允许0.05MM;
3. 端子平面度: 0.10MM MAX;
4. 产品符合ROHS环保要求;
5. 镀层顺序及厚度, 镍 $\geq 1.27\mu\text{M}$; 锡 $\geq 5.0\mu\text{M}$;
6. 整模产品线轴结合线不可有毛刺;

REV	DATE	REVISIONS REC




东莞市福讯达塑胶制品有限公司

DONGGUAN FU XUN DA PLASTICS PRODUCTS CO., LTD

地址: 东莞市横沥镇三江工业区116栋

TEL: 0769-82218739 82218769 FAX: 0769-82218929

DRAFTER	ZHANG SHAO YONG	TOLERANCE	DATE:
CHECK	CHEN YONG LONG	0<L≤4 ±0.1	2025.07.21
APPROVED	ZHU DONG SHENG	4<L≤16 ±0.2	
		16<L≤50 ±0.3	
		PIN PITCH ±0.2	



DRAWING TITLE: EFD25	TERMIAL DIMENTION: 端子	ANGLE: ±1°
MODLE NAME: FX-S-2523-1	TERMINAL MATERIAL: C5191	UNIT: mm
SPECIFICATION: 6+6 PIN	UL RATING: 94V-0	SCALE: 1 : 1
BOBBING MATERIAL: PM9630	PULLING STRENGTH: 1.5Kg/MIN	REV: A/0